





AVK SWING CHECK VALVES WITH BARE SHAFT PRESSURE LOSS, DN50, DN65, DN80 AND DN100



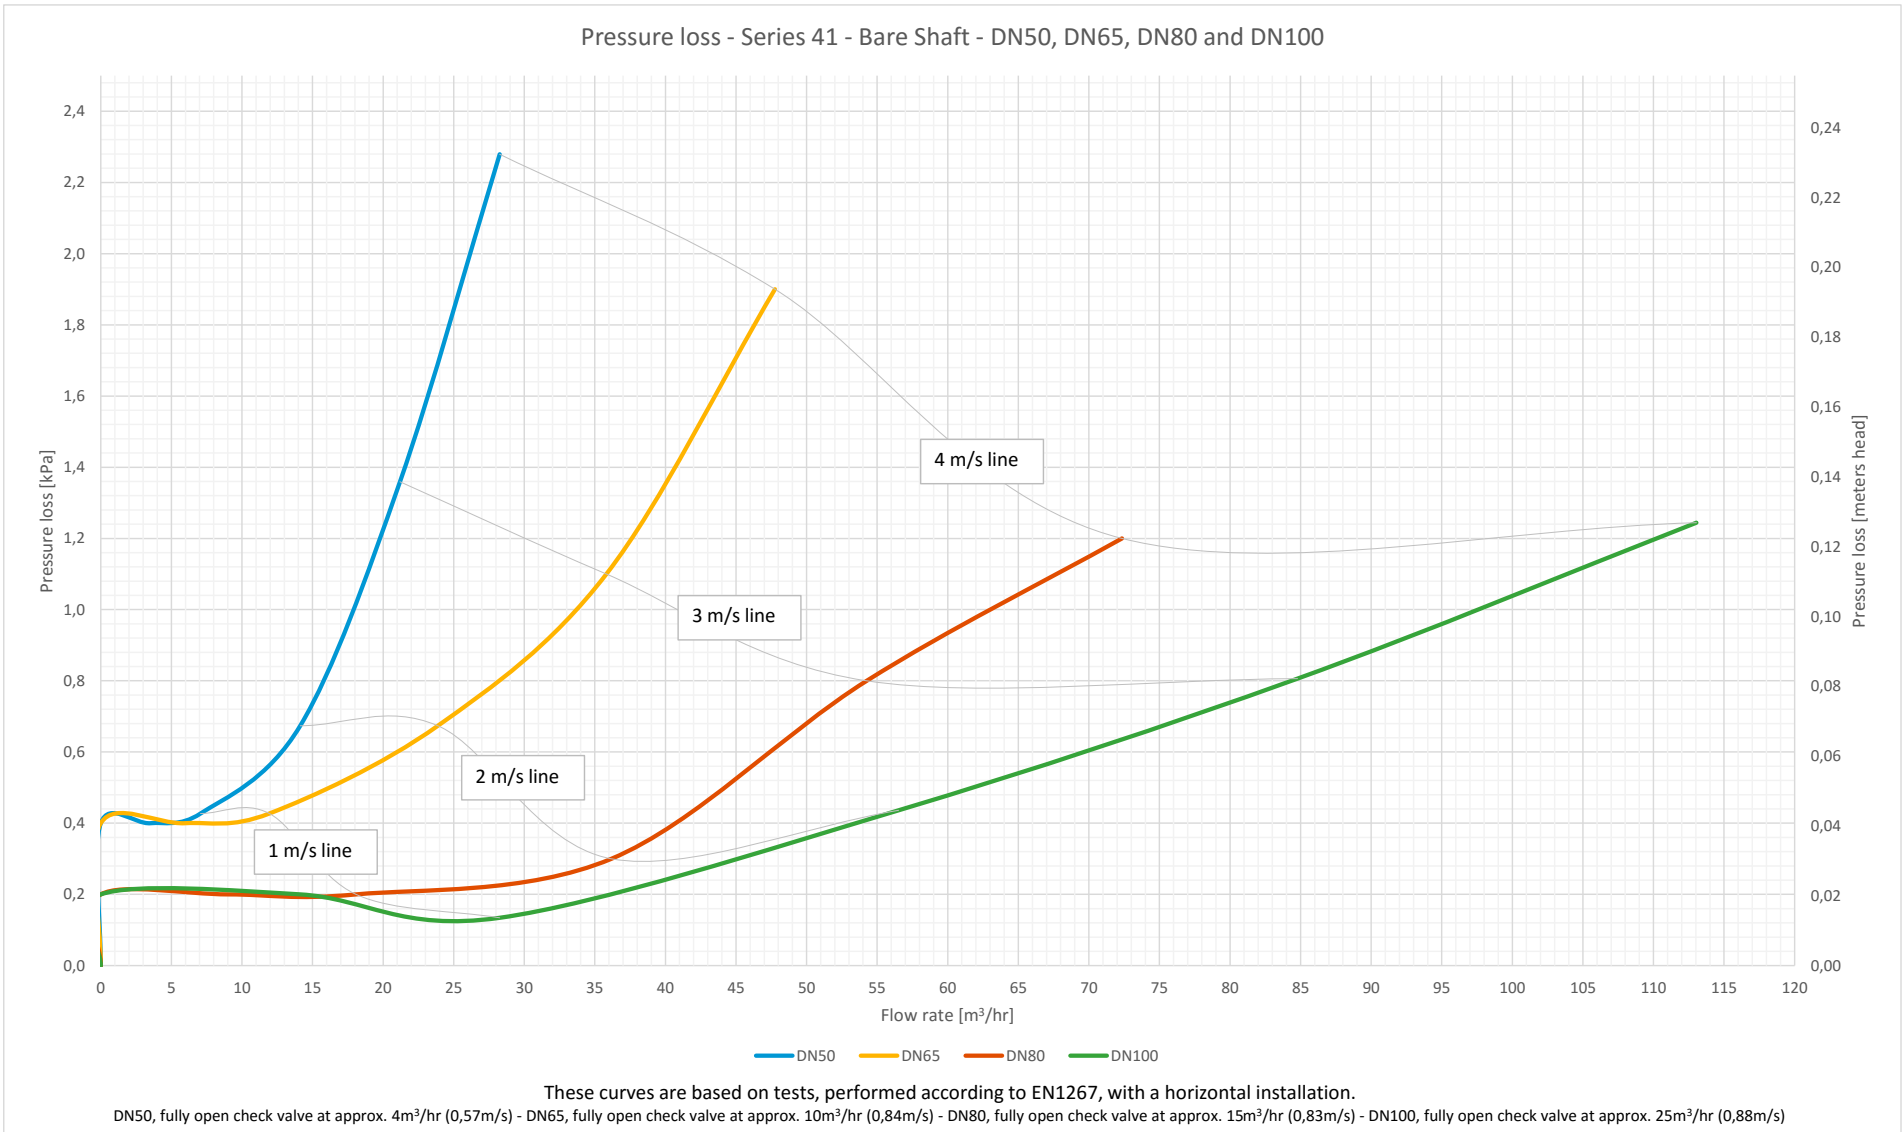

AVK SWING CHECK VALVES WITH BARE SHAFT PRESSURE LOSS, DN125, DN150 AND DN200

Pressure loss - Series 41 - Bare Shaft - DN125, DN150 and DN200

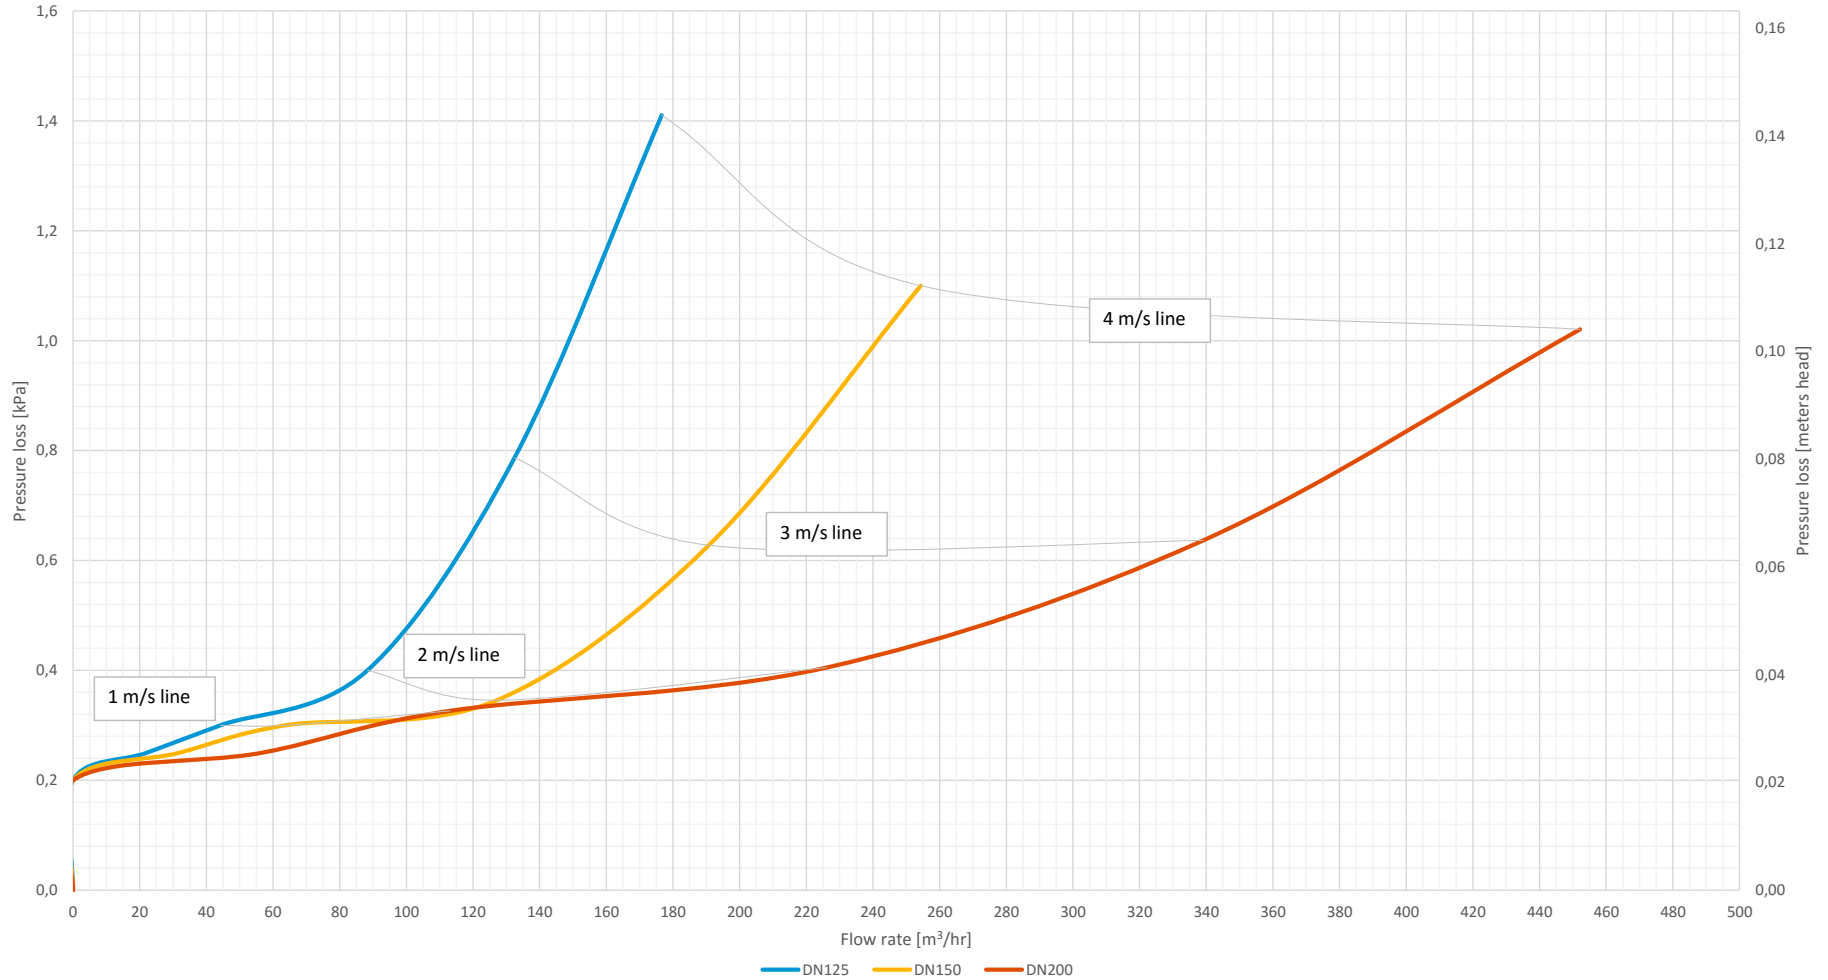


These curves are based on tests, performed according to EN1267, with a horizontal installation.
 DN125, fully open check valve at approx. 35m³/hr (0,79m/s) - DN150, fully open check valve at approx. 55m³/hr (0,86m/s) - DN200, fully open check valve at approx. 100m³/hr (0,88m/s)



AVK SWING CHECK VALVES WITH BARE SHAFT PRESSURE LOSS, DN250 AND 300

Pressure loss - Series 41 - Bare Shaft - DN250 and DN300

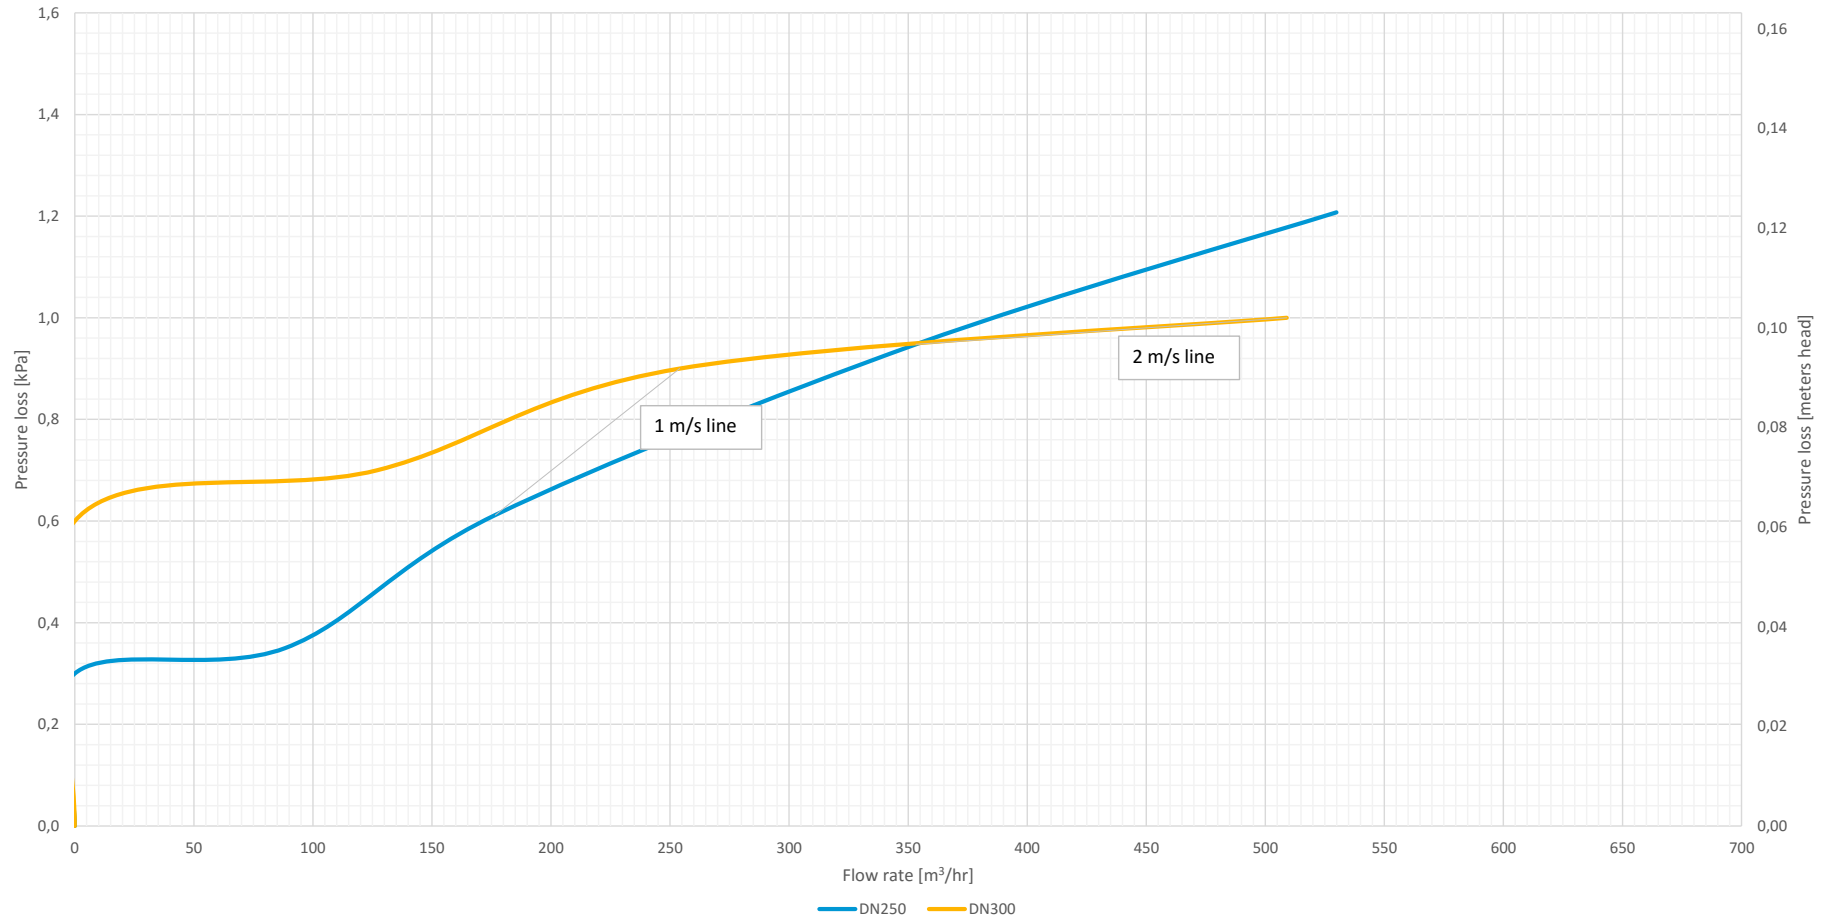


These curves are based on tests, performed according to EN1267, with a horizontal installation.
DN250, fully open check valve at approx. 130m³/hr (0,74m/s) - DN300, fully open check valve at approx. 180m³/hr (0,71m/s)





AVK SWING CHECK VALVES WITH LEVER SPRING PRESSURE LOSS, DN50, DN65, DN80 AND DN100

Pressure loss - Series 41 - Spring - DN50, DN65, DN80 and DN100

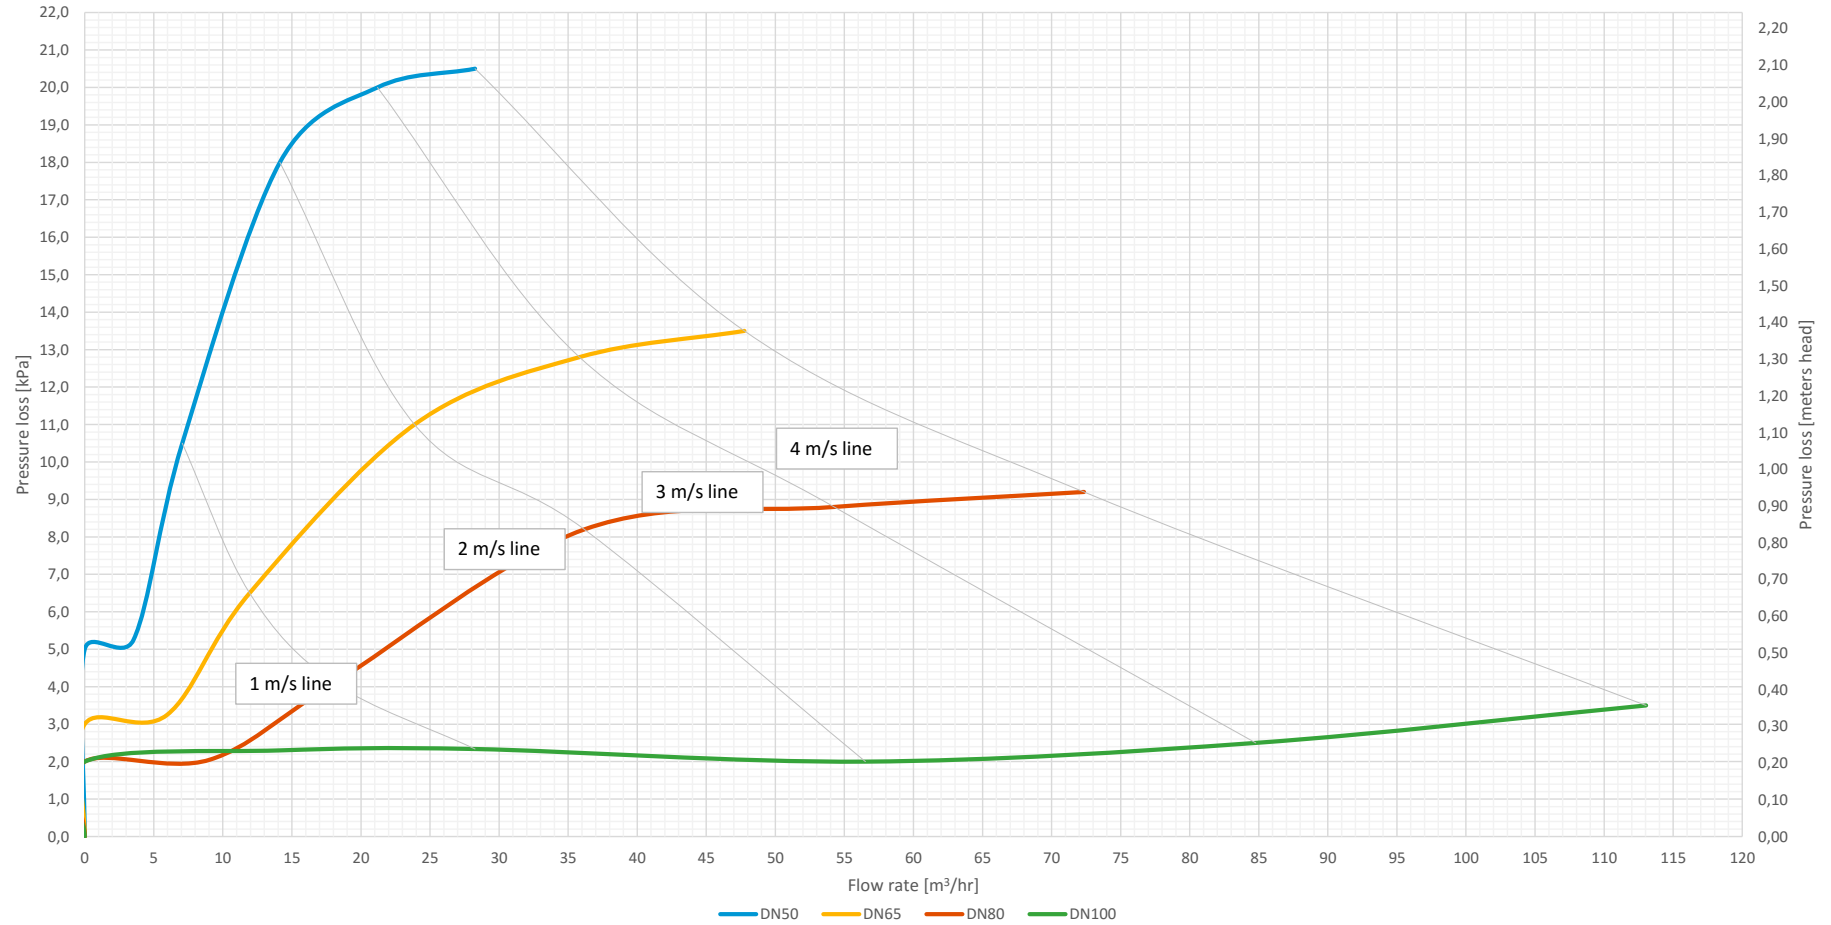


These curves are based on tests, performed according to EN1267, with a horizontal installation.

DN50, fully open check valve at approx. 25m³/hr (3,54m/s) - DN65, fully open check valve at approx. 35m³/hr (2,93m/s) - DN80, fully open check valve at approx. 45m³/hr (2,49m/s) - DN100, fully open check valve at approx. 50m³/hr (1,77m/s)





AVK SWING CHECK VALVES WITH LEVER SPRING PRESSURE LOSS, DN125, DN150 AND DN200

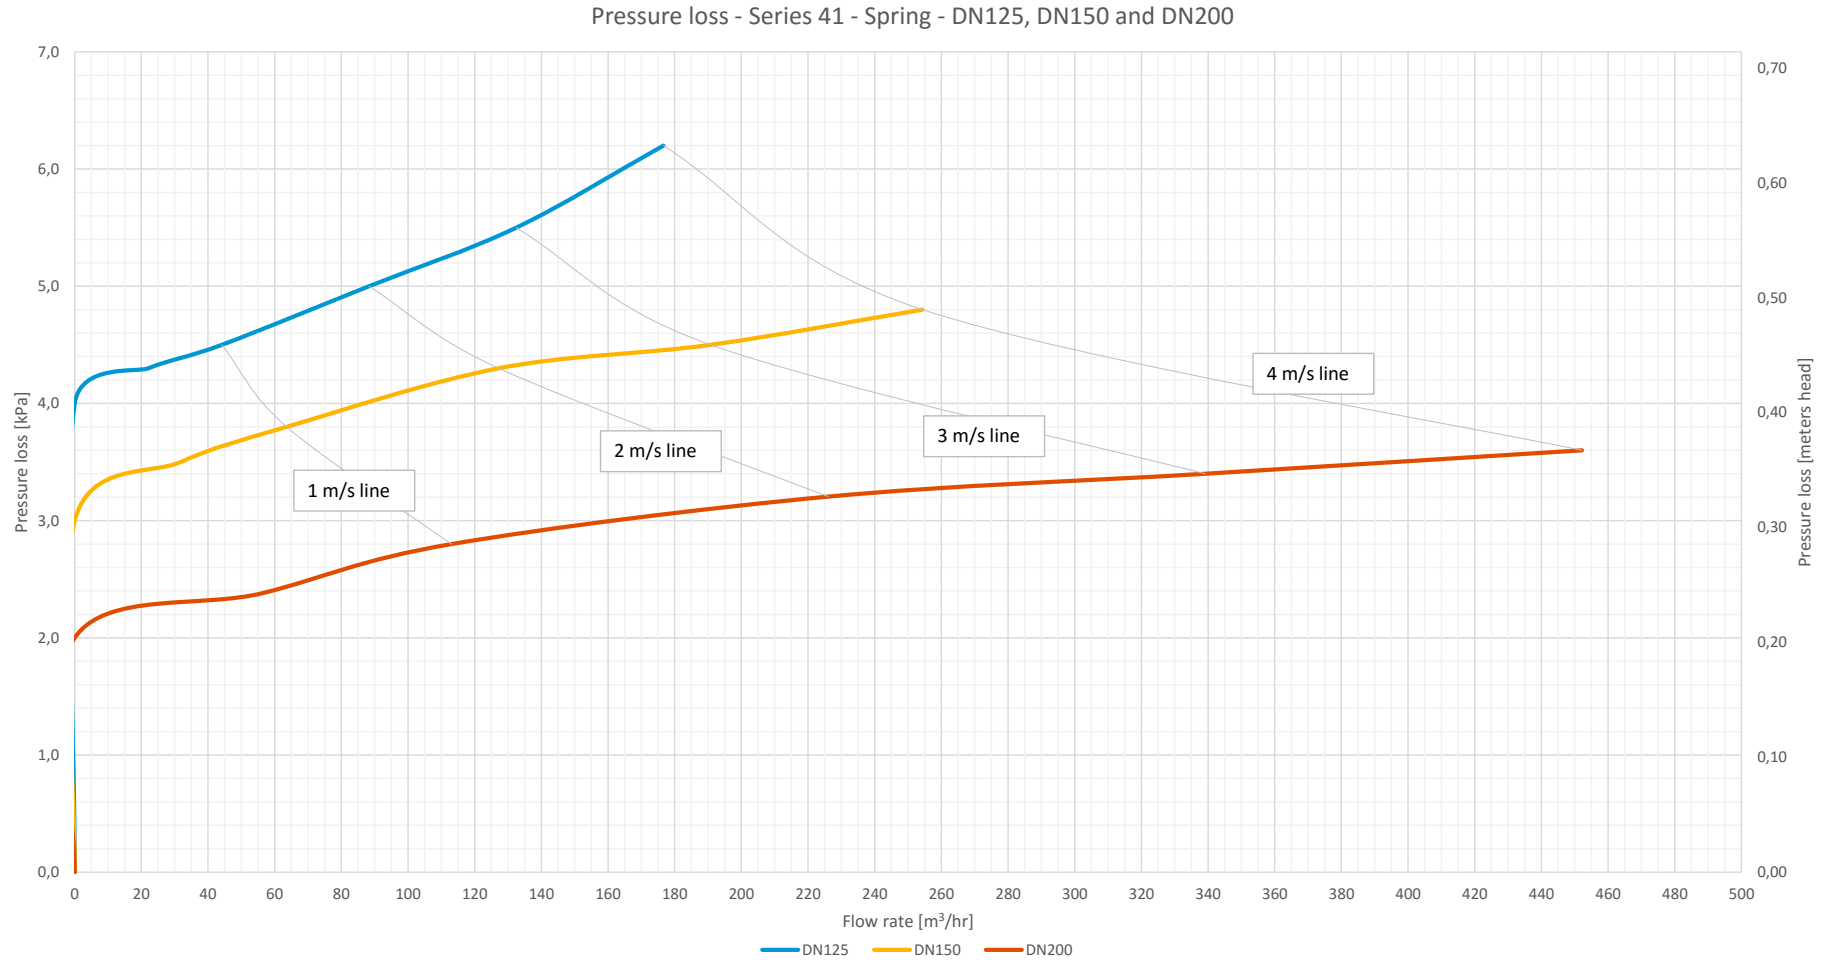


These curves are based on tests, performed according to EN1267, with a horizontal installation.
 DN125, fully open check valve at approx. 43m³/hr (0,97m/s) - DN150, fully open check valve at approx. 70m³/hr (1,10m/s) - DN200, fully open check valve at approx. 130m³/hr (1,15m/s)





AVK SWING CHECK VALVES WITH LEVER SPRING PRESSURE LOSS, DN250 AND DN300

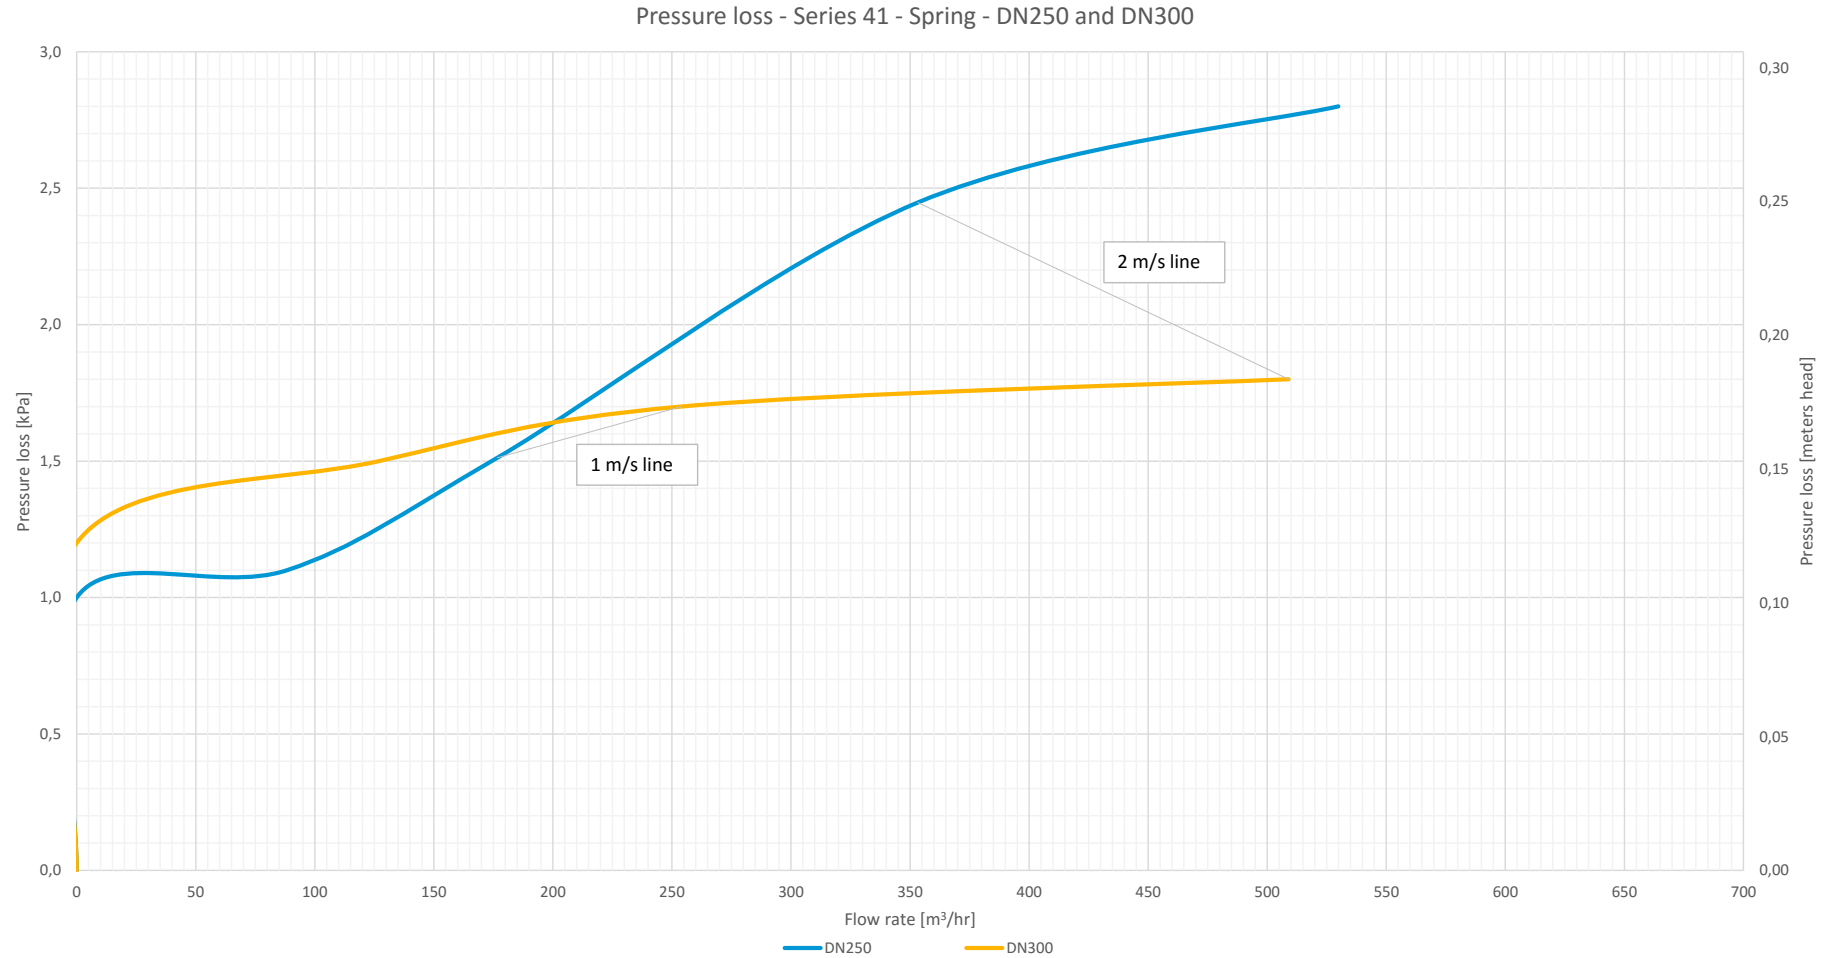


These curves are based on tests, performed according to EN1267, with a horizontal installation.
DN 250, fully open check valve at approx. 225 m³/hr (1,27m/s) - DN300, fully open check valve at approx. 330m³/hr (1,30m/s)






AVK SWING CHECK VALVES WITH LEVER WEIGHT PRESSURE LOSS, DN50, DN65, DN80 AND DN100

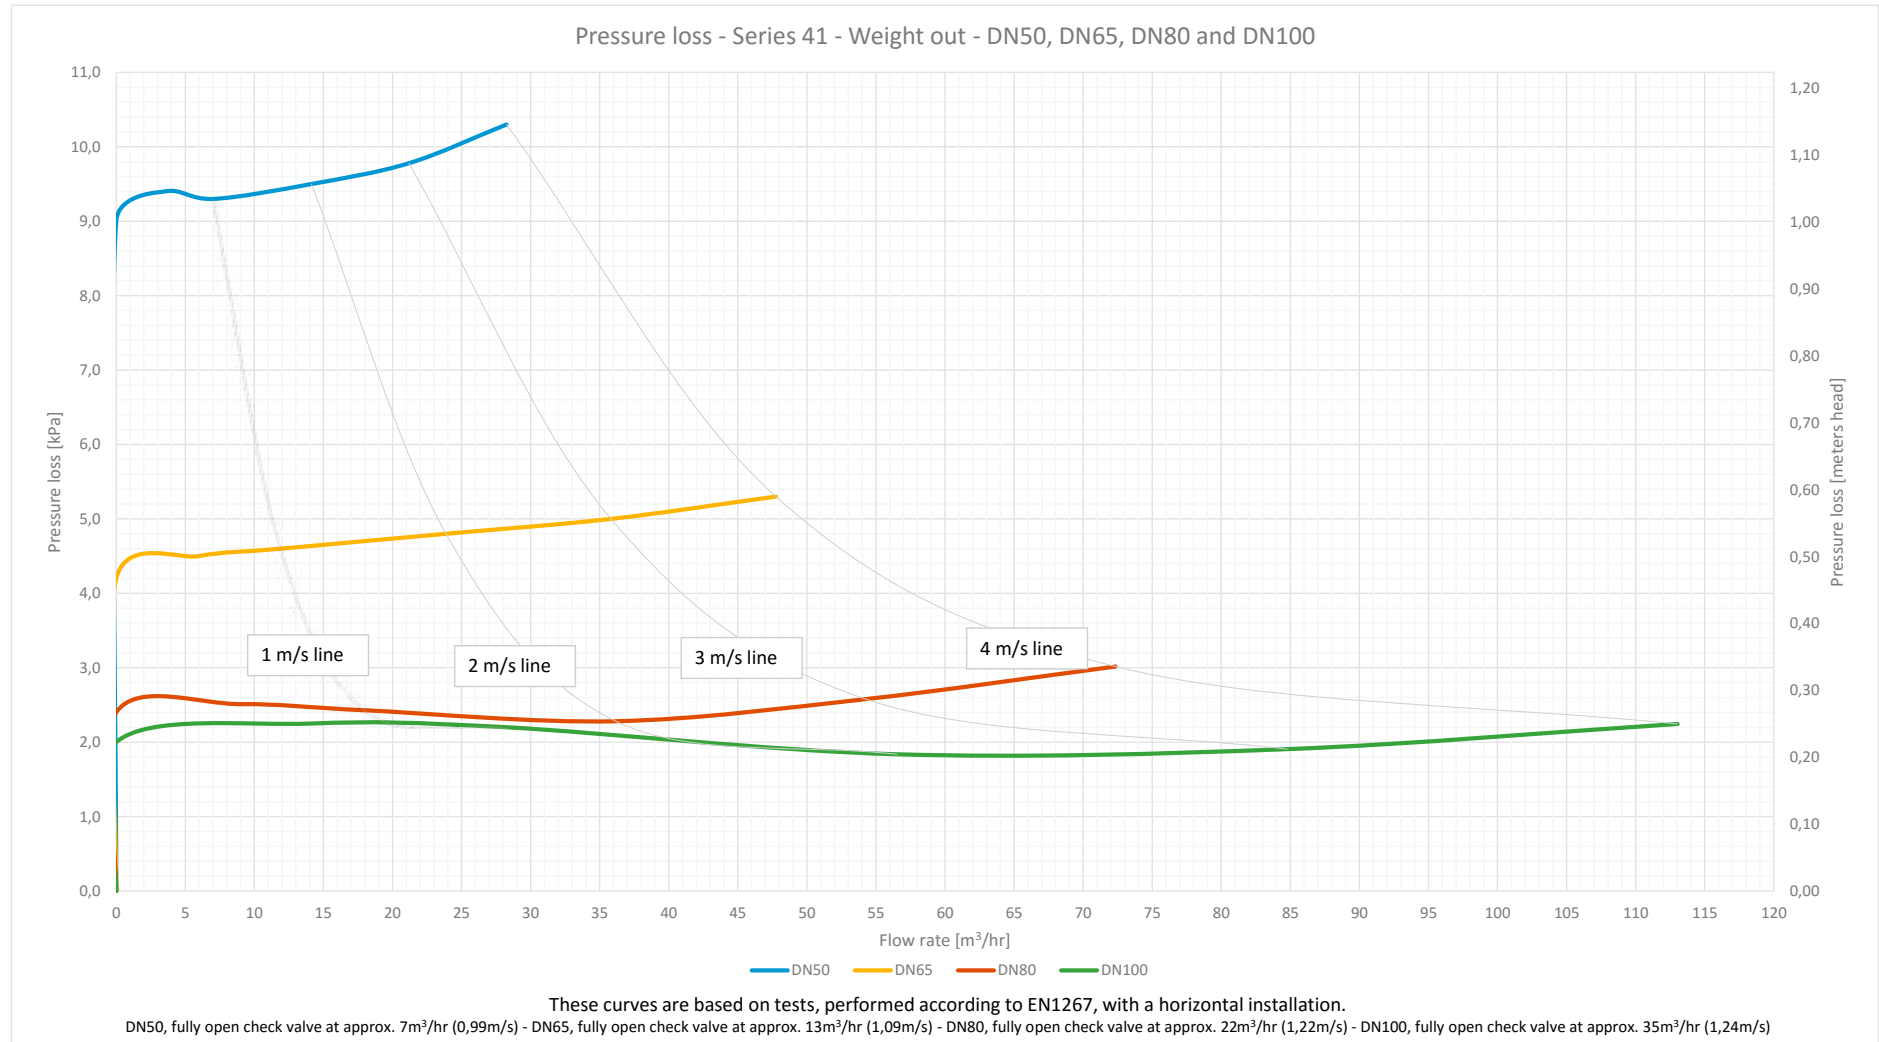



AVK SWING CHECK VALVES WITH LEVER WEIGHT PRESSURE LOSS, DN125, DN150 AND DN200

Pressure loss - Series 41 - Weight Out - DN125, DN150 and DN200

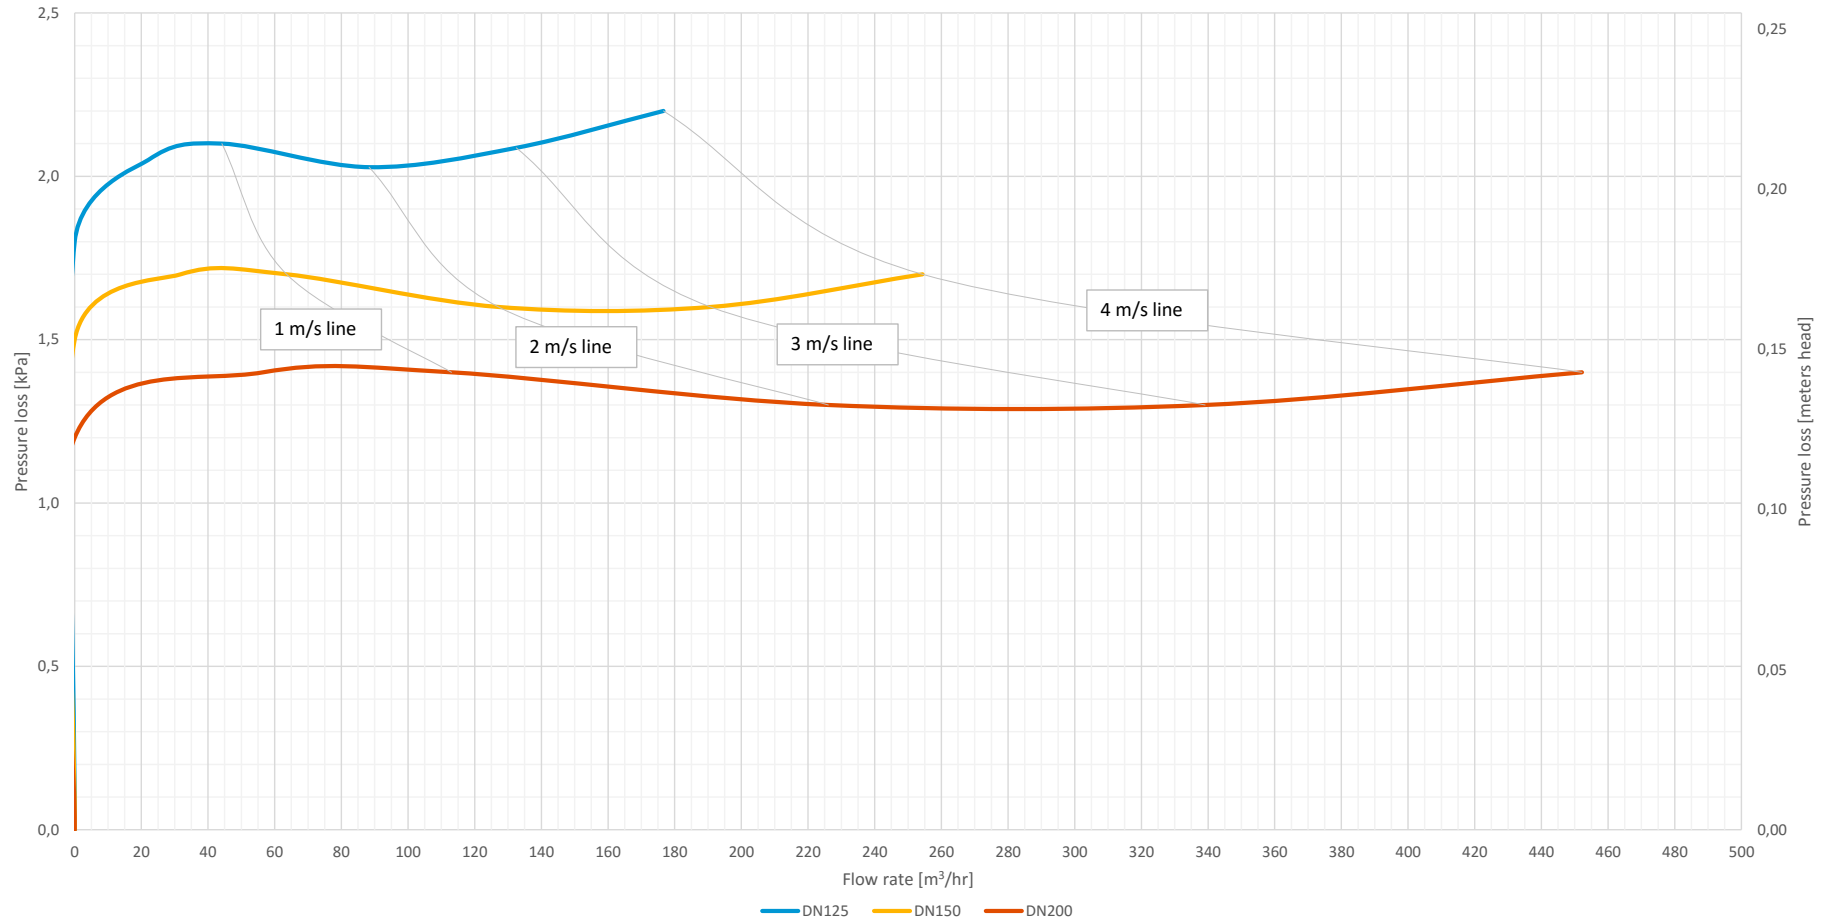


These curves are based on tests, performed according to EN1267, with a horizontal installation.
 DN125, fully open check valve at approx. 55m³/hr (1,24m/s) - DN150, fully open check valve at approx. 75m³/hr (1,18m/s) - DN200, fully open check valve at approx. 140m³/hr (1,24m/s)





AVK SWING CHECK VALVES WITH LEVER WEIGHT PRESSURE LOSS, DN250 AND DN300

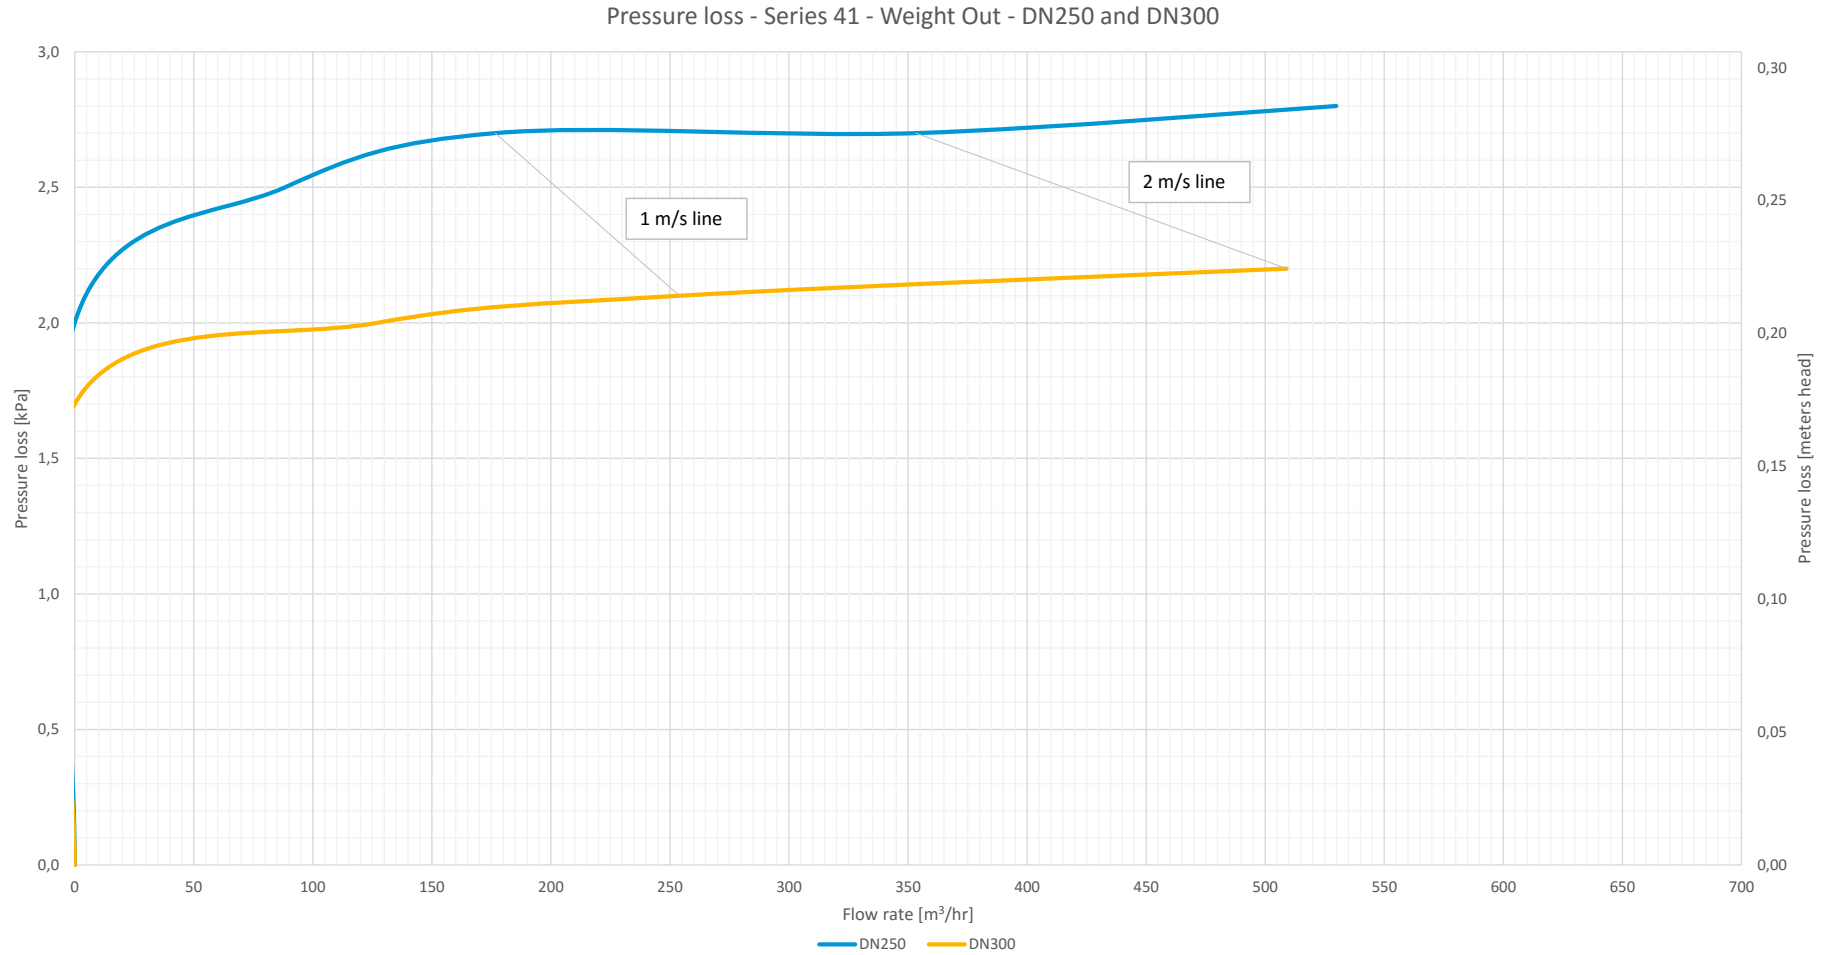

These curves are based on tests, performed according to EN1267, with a horizontal installation.
DN250, fully open check valve at approx. 220m³/hr (1,24m/s) - DN300, fully open check valve at approx. 230m³/hr (1,30m/s)