
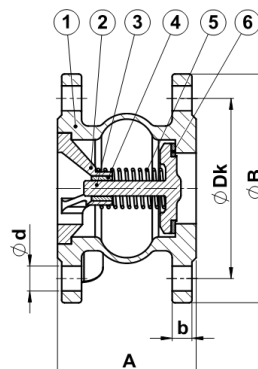


NEPOVRATNI VENTIL, SILENT, PRIROBNIČNI / SILENT CHECK VALVE

// Delovna temperatura / Working temperature: 0 °C / +100 °C





Materiali / Materials

1	Ohišje Body	Siva litina – EN-GJL-250 (GG25) Cast Iron – EN-GJL-250 (GG25)	4	Puša Bushing	Medenina Brass
2	Nosilec vretena Guide	Siva litina – EN-GJL-250 (GG25) Cast Iron – EN-GJL-250 (GG25)	5	Vzmet Spring	Nerjavno jeklo – X5CrNi18-10 (A304) Stainless Steel – X5CrNi18-10 (A304)
3	Vreteno in disk Guiding stem	Siva litina – EN-GJL-250 (GG25) Cast Iron – EN-GJL-250 (GG25)	6	Tesnilo Seal	EPDM

PN16

Art.	DN	A	ØB	ØDk	b	n-Ød	Teža / Weight [kg]
A002206	50	100	165	125	18	4-18	5,7
A002207	65	120	185	145	20	4-18	8,7
A002208	80	140	200	160	20	8-18	10,8
A002209	100	170	220	180	22	8-18	13,5
A002210	125	200	250	210	24	8-18	21,0
A002211	150	230	285	240	26	8-18	30,0
A002212	200	300	340	295	26	12-23	49,0
A031285	250	370	405	355	30	12-23	73,3
A043384	300	410	460	410	32	12-27	131,0

SESALNI KOŠ ZA NEPOVRATNI VENTIL / STRAINER FOR SILENT CHECK VALVE

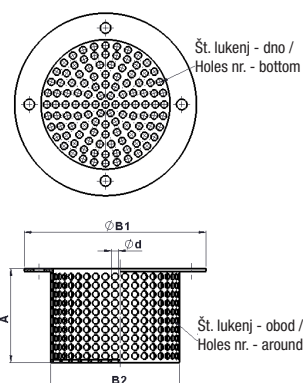

Materiali / Materials

1	Ohišje Body	Pocinkano jeklo Galvanized Steel
---	----------------	-------------------------------------

PN16

Art.	DN	A	B1	B2	d	Št lukenj - obod / Holes nr. - around	Št. Lukenj - dno / Holes nr. - bottom	Teža / Weight [kg]
A034093	50	80	155	110	6	360	125	0,40
A034094	65	100	176	131	6	535	180	0,70
A034095	80	120	192	148	6	725	225	0,80
A034096	100	150	212	168	6	1030	290	1,00
A034097	125	175	242	198	6	1410	400	1,50
A034098	150	200	276	222	6	1810	505	2,70
A034099	200	245	327	278	6	2860	845	3,50
A034100	250	300	385	329	6	4145	1180	4,50
A043385	300	350	445	384	6	5640	1610	5,50