
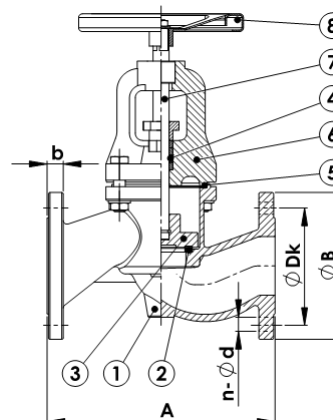


ZAPORNI VENTIL, INOX TESNENJE / GLOBE VALVE, STAINLESS STEEL TRIM

// Delovna temperatura / Working temperature: 0 °C /+180 °C



Materiali / Materials

1	Ohišje Body	Siva litina – EN-GJL-250 (GG25) Cast Iron – EN-GJL-250 (GG25)	5	Tesnilo pokrova Bonnet gasket	Grafit Graphite
2	Tesnilo ohišja Seat ring	Nerjavno jeklo – X5CrNi18-10 (A304) Stainless Steel – X5CrNi18-10 (A304)	6	Pokrov Bonnet	Siva litina – EN-GJL-250 (GG25) Cast Iron – EN-GJL-250 (GG25)
3	Disk Disc	Nerjavno jeklo – X5CrNi18-10 (A304) Stainless Steel – X5CrNi18-10 (A304)	7	Vreteno Stem	Nerjavno jeklo – X5CrNi18-10 (A304) Stainless Steel – X5CrNi18-10 (A304)
4	Puša Packing	Grafit Graphite	8	Ročni pogon Handwheel	Jeklo Steel

PN16

Art.	DN	A	B	Dk	b	n-Ød	Teža / Weight [kg]
A029560	15	130	95	65	14	4-14	3,0
A029562	20	150	105	75	16	4-14	4,0
A029563	25	160	115	85	16	4-14	5,5
A029564	32	180	140	100	18	4-18	8,0
A029566	40	200	150	110	18	4-18	11,0
A029567	50	230	165	125	20	4-18	14,7
A029568	65	290	185	145	20	4-18	17,8
A029569	80	310	200	160	22	8-18	26,7
A029570	100	350	220	180	24	8-18	35,4
A029571	125	400	250	210	26	8-18	59,0
A029572	150	480	285	240	26	8-23	78,0
A029573	200	600	340	295	30	12-23	136,0
A058692	250	730	405	355	30	12-28	218,3

Opombe

Vgradna dolžina ustreza standardu EN558-1 serija 1 (DIN3202 F1).

Notes

Face to face dimensions conform to EN558-1 Series 1 (DIN3202 F1).