


BAYLAN

WATER METERS

TK-26

Multi jet Dry type Water Meter

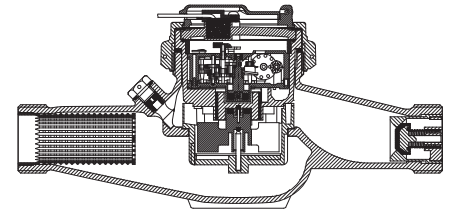

GENERAL

- MID Certified
- Reading with reed sensor
- 1 pulse output at 1/10/100 lt
- Multi jet working principle assures a long service time
- Suitable for potable water
- 360° rotating lid
- Low pressure loss, high sensitivity at initial flow
- Electrostatic painted body made of corrosion resistant brass
- Available for optical reading • Non return valve
- Pulse output and AMR reading features are optional
- 3 years of warranty • Almost no maintenance
- Suitable for cold water up to 50°C
- Service and spare parts available for 10 years
- IP68 Protected
- Environmental Classes

Climatic : -10°C/+55°C | Mechanic: M1/O | Elektromagnetic: E2

- $Q2 \leq Q \leq Q4$ Maximum Permissible Error

Class 2 Water Meters; $\% \pm 2$ (Water Temp. $\leq 30^\circ\text{C}$), $\% \pm 3$ (Water Temp. $> 30^\circ\text{C}$)

Class 1 Water Meters; $\% \pm 1$ (Water Temp. $\leq 30^\circ\text{C}$), $\% \pm 2$ (Water Temp. $> 30^\circ\text{C}$)

- $Q1 \leq Q < Q2$ Maximum Permissible Error

Class 2 Water Meters; $\% \pm 5$ | Class 1 Water Meters; $\% \pm 3$



PERFORMANCE DATA

Overload Flowrate	Q4	m ³ /h	12,5
Permanent Flowrate	Q3	m ³ /h	10
Transitional Flowrate	Q2	m ³ /h	0,064
Minimum Flowrate	Q1	m ³ /h	0,04
Q3/Q1 (MI-001 OIML R49)			≤ 250
Mounting on the network			Horizontal
Maximum Registration Capacity			99999 / 99999,99 / 99999,999
Initial Flowrate	Qi	l/h	9
Maximum Working Pressure		bar	16
Maximum Working Temperature		°C	50
Pressure Loss Class		bar	0,63
Smallest Reading Resolution		m ³	0,00005
Class			Class 1 / Class 2

DIMENSIONS

Nominal diameter	DN	25	32	mm
Connecting diameter	D	G1 1/4	G1 1/2	B
Total overall meter height	H	120,5	124	mm
Axis height	h	40,8	47	mm
Width	B	92	92	mm
Length	L	260	260	mm
Length with connections	LB	380	380	mm
Unit weight		2,21	2,24	kg
Package Weight (without connect)		23,34	23,39	kg
Package Weight (with connect)		27,84	30,19	kg
Quantity per package		10	10	pcs
Package dimensions		26x52x30	26x52x30	cm

