

GAV 1060

SHUT-OFF VALVES

GATE VALVES



GATE VALVE

Gate valve for heating and cooling systems. Available in pressure class PN 16.

TA-SC[®]

GAV 1060

SHUT-OFF VALVES

TECHNICAL DESCRIPTION

Applications:

Heating and cooling systems.

Function:

Shut-off

Dimensions:

DN 50-600

Pressure class:

PN 16

Temperature:

Max. working temperature: 120°C

Min. working temperature: -10°C

Material:

Body and bonnet: Ductile iron EN-JS1050

Wedge: Ductile iron EN-JS1050

Body and wedge trim: Bronze EN1982 CC491K

Stem: Stainless steel BS970 420S37

Stem nut: Bronze EN1982 CC491K

Gasket and packing: Graphite, non-asbestos

Handwheel: Ductile iron EN-JS1050

Surface treatment:

Valve body: Two pack epoxy coating system, dark grey.

Handwheel: Two pack epoxy coating system, black.

Marking:


TA-SC, CE, PN and DN.

Valve standard:

According to BS 5150 (EN 1171) and MSS SP-70.

Flanges:

According to EN 1092-2.

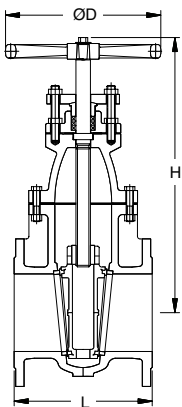

TA No	DN	D	L	H	Kg
77 106-050	50	178	178	327	22
77 106-065	65	178	191	322	24
77 106-080	80	190	203	340	28
77 106-090	100	250	229	420	48
77 106-091	125	300	254	477	68
77 106-092	150	300	267	542	82
77 106-093	200	356	292	668	135
77 106-094	250	400	330	750	213
77 106-095	300	457	356	835	314
77 106-096	350	508	381	1015	400
77 106-097	400	558	406	1120	610
77 106-098	450	610	432	1210	800
77 106-099	500	610	457	1250	980
77 106-001	600	762	508	1390	1320

Tour & Andersson retains the right to make changes to its products and specifications without prior notice.

2-60-50 GAV 1060 2008.04

TA-SC[®]